


WiFi 6 (802.11ax) 4x4 MU-MIMO OFDMA 5GHz Single Band Wireless Module

Model: WLE3000H5



KEY FEATURES

- Qualcomm Atheros QCN6024/9024 for commercial grade
- Qualcomm Atheros QCN9074 for industrial grade
- 5GHz, 4x4 MU-MIMO OFDMA Technology, up to 4804Mbps physical data rate
- Single Band 5GHz 4x4 WiFi 6 (802.11ax)
- MiniPCIe interface with PCIe 3.0
- Supports Dynamic Frequency Selection (DFS)
- Heat sink allows free air operation
- Supports IEEE 802.11d, e, h, i, j, k, r, u, v time stamp, w standard
- Designed for High Bandwidth Enterprise Wireless Access Points

Specifications

Chipset	Qualcomm Atheros QCN6024/9024 'PINE' Series for Commercial Grade Qualcomm Atheros QCN9074 'PINE' Series for Industrial Grade
System Memory	2Mbit serial I ² C bus EEPROM
Reference Design	PN02.1
Host Interface	MiniPCIe interface with PCIe 3.0
Operating Voltage	3.3V
Power Consumption	8.8W (Max)
Wireless	5GHz 802.11a/n/ac/ax, max 19dBm per chain 4x U.FL Connectors
Frequency Range	5.150~5.850GHz (QCN6024/9024) 4.920~5.850GHz (QCN9074)
Modulation Techniques	OFDMA: BPSK, QPSK, DBPSK, DQPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM
Channel Spectrum Widths for WLAN	Supports 20/40/80/160MHz at 5GHz
Operating Systems	OpenWRT
Certification	REACH & RoHS Compliance
Environmental Temperature	Operating (Commercial Grade): -20°C to 70°C, Storage: -40°C to 90°C Operating (Industrial Grade): -40°C to 85°C, Storage: -40°C to 90°C
Environmental Humidity, Non-Condensing	Operating: 5% to 95%, Storage: Max. 90%
Dimensions (W x H x D) in mm	**Please refer to Hardware Guide

*Configurations are subject to change without notifications.

**Can be requested from respective sales executive.

RF Performance Table at 5GHz

	Data Rate	TX Power (per chain)	TX Power (4 chains)	Tolerance
5GHz 802.11a	6Mbps	19dBm	25dBm	±2dB
	9Mbps	19dBm	25dBm	±2dB
	12Mbps	19dBm	25dBm	±2dB
	18Mbps	19dBm	25dBm	±2dB
	24Mbps	18dBm	24dBm	±2dB
	36Mbps	18dBm	24dBm	±2dB
	48Mbps	18dBm	24dBm	±2dB
	54Mbps	18dBm	24dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 8	13dBm	19dBm	±2dB
	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
5GHz 802.11ac VHT80	MCS 9	13dBm	19dBm	±2dB
	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	TBD	±2dB
	9Mbps	TBD	±2dB
	12Mbps	TBD	±2dB
	18Mbps	TBD	±2dB
	24Mbps	TBD	±2dB
	36Mbps	TBD	±2dB
	48Mbps	TBD	±2dB
	54Mbps	TBD	±2dB
5GHz 802.11n/ac VHT20	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
5GHz 802.11n/ac VHT40	MCS 8	TBD	±2dB
	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
	MCS 8	TBD	±2dB
5GHz 802.11ac VHT80	MCS 9	TBD	±2dB
	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
	MCS 8	TBD	±2dB
	MCS 9	TBD	±2dB

RF Performance Table at 5GHz

	Data Rate	TX Power (per chain)	TX Power (4 chains)	Tolerance
5GHz 802.11ac VHT160	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB
5GHz 802.11ax HE20	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB
	MCS 10	13dBm	19dBm	±2dB
	MCS 11	10dBm	17dBm	±2dB
	MCS 12	10dBm	16dBm	±2dB
	MCS 13	10dBm	16dBm	±2dB
5GHz 802.11ax HE40	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB
	MCS 10	13dBm	19dBm	±2dB
	MCS 11	10dBm	17dBm	±2dB
	MCS 12	10dBm	16dBm	±2dB
	MCS 13	10dBm	16dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11ac VHT160	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
	MCS 8	TBD	±2dB
	MCS 9	TBD	±2dB
5GHz 802.11ax HE20	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
	MCS 8	TBD	±2dB
	MCS 9	TBD	±2dB
	MCS 10	TBD	±2dB
	MCS 11	TBD	±2dB
	MCS 12	TBD	±2dB
	MCS 13	TBD	±2dB
5GHz 802.11ax HE40	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
	MCS 8	TBD	±2dB
	MCS 9	TBD	±2dB
	MCS 10	TBD	±2dB
	MCS 11	TBD	±2dB
	MCS 12	TBD	±2dB
	MCS 13	TBD	±2dB

RF Performance Table at 5GHz

	Data Rate	TX Power (per chain)	TX Power (4 chains)	Tolerance
5GHz 802.11ax HE80	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB
	MCS 10	13dBm	19dBm	±2dB
	MCS 11	10dBm	17dBm	±2dB
	MCS 12	10dBm	16dBm	±2dB
	MCS 13	10dBm	16dBm	±2dB
5GHz 802.11ax HE160	MCS 0	18dBm	24dBm	±2dB
	MCS 1	18dBm	24dBm	±2dB
	MCS 2	18dBm	24dBm	±2dB
	MCS 3	18dBm	24dBm	±2dB
	MCS 4	18dBm	24dBm	±2dB
	MCS 5	16dBm	25dBm	±2dB
	MCS 6	16dBm	25dBm	±2dB
	MCS 7	15dBm	23dBm	±2dB
	MCS 8	13dBm	19dBm	±2dB
	MCS 9	13dBm	19dBm	±2dB
	MCS 10	13dBm	19dBm	±2dB
	MCS 11	10dBm	17dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11ax HE80	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
	MCS 8	TBD	±2dB
	MCS 9	TBD	±2dB
	MCS 10	TBD	±2dB
	MCS 11	TBD	±2dB
	MCS 12	TBD	±2dB
	MCS 13	TBD	±2dB
5GHz 802.11ax HE160	MCS 0	TBD	±2dB
	MCS 1	TBD	±2dB
	MCS 2	TBD	±2dB
	MCS 3	TBD	±2dB
	MCS 4	TBD	±2dB
	MCS 5	TBD	±2dB
	MCS 6	TBD	±2dB
	MCS 7	TBD	±2dB
	MCS 8	TBD	±2dB
	MCS 9	TBD	±2dB
	MCS 10	TBD	±2dB
	MCS 11	TBD	±2dB

Component Map

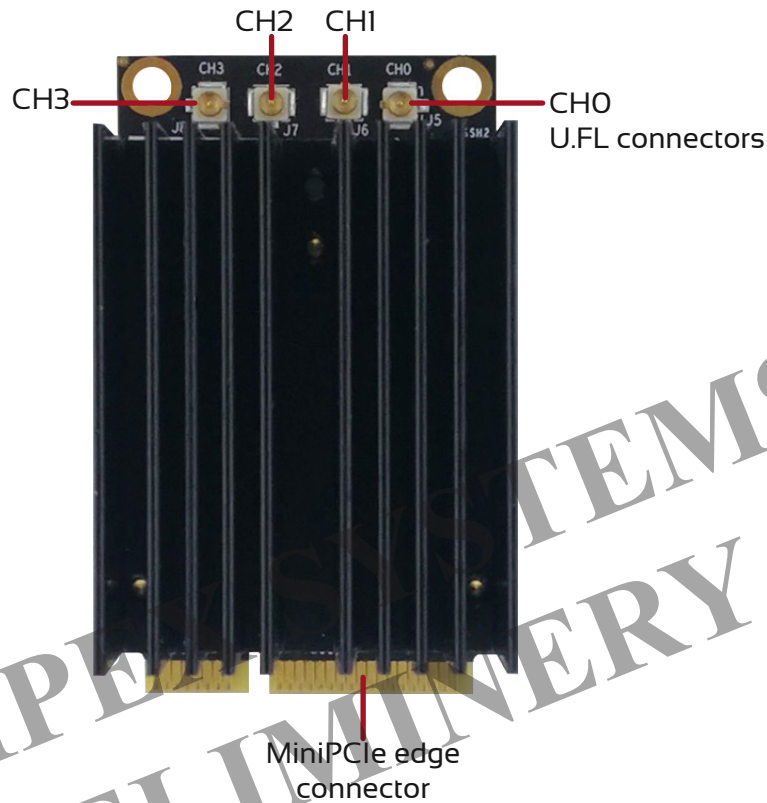

Ordering Configuration

Item Code	Model	Description
COMMERCIAL GRADE (-20°C to 70°C)		
WLE3000H5 7A0624S	WLE3000H5	QCN6024 4x4 802.11a/n/ac/ax support 5GHz MiniPCle interface with PCIe 3.0 Module
WLE3000H5 7A0924S	WLE3000H5	QCN9024 4x4 802.11a/n/ac/ax support 5GHz MiniPCle interface with PCIe 3.0 Module
WLE3000H5 7A0974S	WLE3000H5	QCN9074 4x4 802.11a/n/ac/ax support 5GHz MiniPCle interface with PCIe 3.0 Module
INDUSTRIAL GRADE (-40°C to 85°C)		
WLE3000H5 7B000S-I	WLE3000H5-I	QCN9074 4x4 802.11a/n/ac/ax support 5GHz MiniPCle interface with PCIe 3.0 Module

Chipsets Comparisons

		QCN6023	QCN6024	QCN9024	QCN9074
Bands	4.9GHz	-	-	-	✓
	6GHz	-	-	✓	✓
	165MHz	-	-	-	✓
	4k QAM	-	-	✓	✓
Advanced 11ax Features	#clients	96	128	256	512
	#OFDMA users	6	8	16	37
	#MU-MIMO users	3	4	4	4
	UL/DL OFDMA	✓	✓	✓	✓
	DL OFDMA w/ TxBF	-	-	✓	✓
	DL MU-MIMO	✓	✓	✓	✓
	UL MU-MIMO (R2)	✓	✓	✓	✓
	Spectrum Scan	-	-	✓	✓
	aDFS/aSA	aDFS	aDFS	aDFS/aSA	aDFS/aSA
	RF Sensing	✓	✓	✓	✓
Management					
Others	FIPS L2	-	-	-	✓